

<b>Description</b>	Modular cube compressed air lubricator of modern design. Threads of ports in body or in adapter plates. Integrated wall mounting system, no brackets necessary. Many different bowl types available.	
<b>Bowl</b>	plastic version with or without bowl guard metal version with or without all-around sight glass	
<b>Operating pressure</b>	max. 11 bar for plastic bowl max. 17 bar for metal bowl with sight glass max. 21 bar for metal bowl without sight glass	
<b>Temperature range</b>	0 °C to 50 °C / 32 °F to 122 °F for plastic bowl 0 °C to 70 °C / 32 °F to 158 °F for metal bowl with sight glass 0 °C to 80 °C / 32 °F to 176 °F for metal bowl without sight glass for appropriately conditioned compressed air down to -30 °C / -22 °F	
<b>Material</b>	Body: zinc die-cast at L35 and L75, Bowl: polyurethane or zinc die-cast Elastomer: NBR/Buna-N	aluminium at L105



Dimensions			Bowl		Flow rate	Operating pressure	Connection thread	Order number
A	B	C	Design	Capacity				
mm	mm	mm	made of / with	l	m <sup>3</sup> /h*1	l/min*1	max. bar	G

## Cube compressed air lubricator L35 / L75 / L105

40	146	93	plastic	0.05	72	1200	11	G <sup>1</sup> / <sub>8</sub>	L 35-01A
40	146	92	metal				21		L 35-01D
40	151	98	metal / sight glass				17		L 35-01W
40	146	93	plastic	0.05	90	1500	11	G <sup>1</sup> / <sub>4</sub>	L 35-02A
40	146	92	metal				21		L 35-02D
40	151	98	metal / sight glass				17		L 35-02W
56	176	120	plastic	0.11	108	1800	11	G <sup>3</sup> / <sub>8</sub>	L 75-03A
56	176	120	plastic / bowl guard				11		L 75-03B
56	173	116	metal				21		L 75-03D
56	179	123	metal / sight glass				17		L 75-03W
56	176	120	plastic	0.11	120	2000	11	G <sup>1</sup> / <sub>2</sub>	L 75-04A
56	176	120	plastic / bowl guard				11		L 75-04B
56	173	116	metal				21		L 75-04D
56	179	123	metal / sight glass				17		L 75-04W
68	218	153	plastic	0.25	270	4500	11	G <sup>1</sup> / <sub>2</sub>	L 105-04A
68	218	153	plastic / bowl guard				11		L 105-04B
68	218	154	metal				21		L 105-04D
68	225	161	metal / sight glass				17		L 105-04W
68	218	153	plastic	0.25	336	5600	11	G <sup>3</sup> / <sub>4</sub>	L 105-06A
68	218	153	plastic / bowl guard				11		L 105-06B
68	218	154	metal				21		L 105-06D
68	225	161	metal / sight glass				17		L 105-06W



L75-03A  
plastic bowl

L75-03D  
metal bowl




L75-03B  
bowl guard

L75-03W  
all-around  
sight glass


## Accessories, enclosed

**mounting bracket** side mounting, made of steel


for L35 **BW00-03**  
for L75 **BW00-04**  
for L105 **BW00-05**

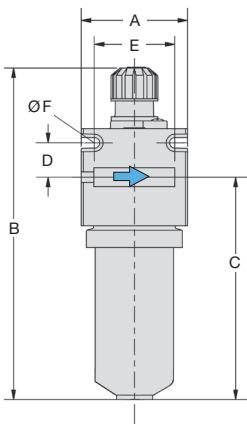


L35...L105




cross section



BW00-03




BW00-04



BW00-05

type	D	E	Ø F
L75	18	42	5.5
L105	20	58	6.5

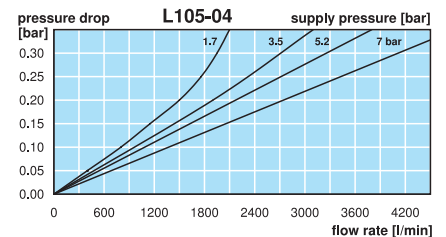

\*1 at 7 bar operating pressure and 0.33 bar pressure drop

**Spare parts: see separate spare parts list**

PDF CAD  
www.aircom.net



**Order example:**  
L35-01A