

# High Pressure Booster up to 100 bar

RLM/RLE

**Description**

The pilot pressure regulator / booster regulates the outlet pressure through a signal pressure at ratio of 1:1. Functioning as a pressure regulator the pilot pressure may either be internally inducted from the inlet pressure or externally. The dome chamber is closed by a needle valve. Functioning as a volume booster the dome is controlled by a proportional pressure regulator or a pilot pressure regulator. compressed air, non-corrosive gases or liquids

**Media**

**Supply pressure** max. 25 bar for RL-0.J1, max. 100 bar for RL-0.J2, max. 40 bar for oxygen, max. 1.5 bar for acetylene

**Pilot pressure** max. 24 bar for RL-0.J1, max. 99 bar for RL-0.J2, pilot port G¼


**Accuracy** at supply pressure variation of 10 bar: 0.1 bar pressure deviation  
at temperature variation of 3 °C / K: 1% pressure deviation at internal pilot pressure

**Air consumption** without constant bleed **Relieving function** non-relieving

**Gauge port** not available **Mounting position** any, dome preferably mounted up

**Temperature range** -20 °C to 100 °C / -4 °F to 212 °F for FKM, -40 °C to 130 °C / -4 °F to 266 °F for EPDM

**Material** Body: brass or stainless steel  
Inner valve: brass or stainless steel  
Elastomer: FKM, optionally EPDM

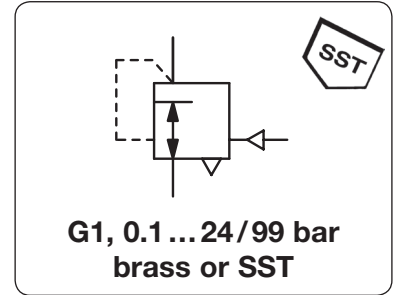

Dimensions			K <sub>v</sub> value	Flow rate	Connection thread	Supply pressure	Pressure range	Order number
A	B	C						
mm	mm	mm	(m <sup>3</sup> /h)	m <sup>3</sup> /h*1	l/min*1	G	max. bar*2	bar

Brass pressure regulator			supply pressure max. 25 / 100 bar, non-relieving, without constant bleed, transmission ratio 1:1, FKM					RLM	
127	170	54	2.9	340	5600	G1	25	0.1 ... 24	RLM-08J1
			2500	60000		G1	100	0.5 ... 99	RLM-08J2



RLM, made of brass

SST pressure regulator			supply pressure max. 25 / 100 bar, non-relieving, without constant bleed, transmission ratio 1:1, FKM					RLE	
127	170	54	2.9	340	5600	G1	25	0.1 ... 24	RLE-08J1
			2500	60000		G1	100	0.5 ... 99	RLE-08J2







RLE, made of stainless steel

**Special options,** add the appropriate letter

**EPDM elastomer**

nitrogen	N <sub>2</sub> : 07	carbon dioxide	CO <sub>2</sub> : 03	argon	Ar: RL . -0 . J . E
helium	He: 09	hydrogen	H <sub>2</sub> : 11	methane	CH <sub>4</sub> : RL . -0 . J . 05
oxygen	O <sub>2</sub> : 15	propane	C <sub>3</sub> H <sub>6</sub> : 16	nitrous oxide	N <sub>2</sub> O: RL . -0 . J . 17

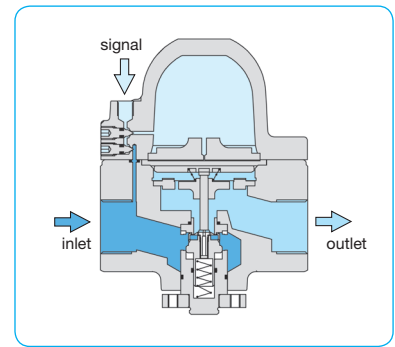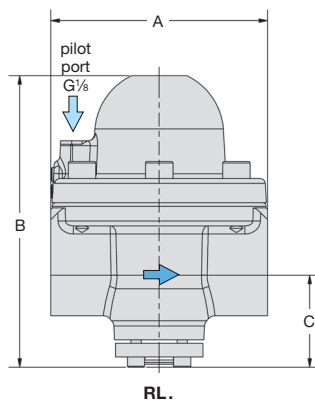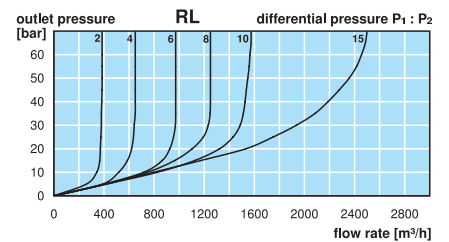

cross section

\*1 RL-J1: at 25 bar supply pressure and 5 bar outlet pressure  
RL-J2: at 85 bar supply pressure and 70 bar outlet pressure

\*2 supply pressure max. 40 bar for oxygen  
supply pressure max. 1.5 bar for acetylene

PDF CAD  
www.aircom.net

Order example:  
RLM-08J1