


PINCH VALVE / 2-PORT / 2-WAY VALVE

Q

Description	The 2-port/2-way valve functions as a pinch valve in a new design of housing with full flow cross-section. Since the straight valve passage has neither constrictions nor back-points, there is no danger of clogging or blockage. Frictional loss is at a minimum.
Media	Compressed air, non-corrosive gases, liquids or other paste-like or powdery media. Solids are enclosed by the flexible sleeve at shut-off.
Sleeve	Highly flexible with double-woven reinforcement in eight different grades. Sleeve simple to change.
Pressures	Operating pressure: max. 4.0 bar Pilot pressure: max. 6.5 Differential pressure: max. 2.5 bar Closing pressure: P ₁ + 2.5 bar to DN32, P ₁ + 2 bar from DN40 on
Vacuum	If vacuum is greater than -100 mbar, vacuum compensation should be provided on the control side.
Mounting position	any
Temperature range	0 °C to max. 100 °C / 32 °F to max. 212 °F, subject to sleeve material
Material	Body: POM at model QP or aluminium die-cast at model QS Sleeve: depending on selected version

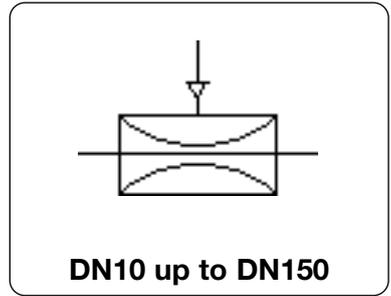

Prop.-V.
11



Dimensions		Nominal size DN	Volume of control chamber l	Pilot port G	Operating pressure max. bar	Connection thread G / flange	Order number
A mm	Ø mm						

Flow control valve							operating pressure max. 4 bar, pilot pressure max. 2.5 bar above operating pressure	Q
80	44	10	0.03	G1/4	4	G3/8	QP10 -03NR	
95	50	15	0.04	G1/4	4	G1/2	QP15 -04NR	
110	58	20	0.05	G1/4	4	G3/4	QP20 -06NR	
125	65	25	0.07	G1/4	4	G1	QP25 -08NR	
140	83	32	0.10	G1/4	4	G1 1/4	QP32 -10NR	
150	95	40	0.13	G1/4	4	G1 1/2	QP40 -12NR	
200	100	50	0.23	G1/4	4	G2	QS50 -16NR	
240	134	65	0.49	G1/4	4	G2 1/2	QS65 -20NR	
290	154	80	0.95	G1/4	4	G3	QS80 -24NR	
280	220	100	1.80	G3/8	4	flange	QS100-FLNR	
350	250	125	3.30	G3/8	4	flange	QS125-FLNR	
420	285	150	6.40	G3/8	4	flange	QS150-FLNR	



Special options, add the appropriate letter

flange connection	according to DIN 2532, PN10	from G1 1/4 on	Q ... -FL ...
sleeve NR	natural rubber, black	80 °C / 176 °F	Q ... - ... NR
sleeve NRL	rubber, suitable for food, black	70 °C / 158 °F	Q ... - ... NL
sleeve NRLH	rubber, suitable for food, light	70 °C / 158 °F	Q ... - ... NH
sleeve NBR	nitrile rubber / Buna-N, suitable for food	80 °C / 176 °F	Q ... - ... NB
sleeve EPDM	ethylene-propylene rubber, suitable for food, black	100 °C / 212 °F	Q ... - ... EP
sleeve FKM	fluorine rubber, black	100 °C / 212 °F	Q ... - ... FK
sleeve CR	chloroprene rubber / neoprene, black	80 °C / 176 °F	Q ... - ... CR
sleeve CSM	natural rubber, chlorosulphonyl polyethylene	80 °C / 176 °F	Q ... - ... CS

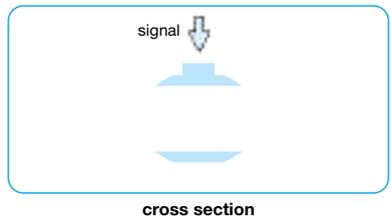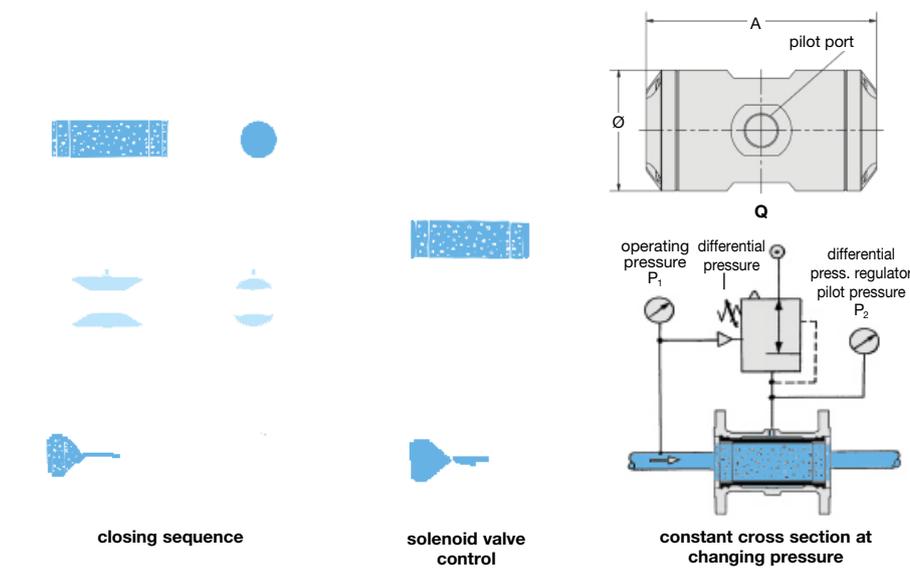

Stainless steel pinch valves: see chapter for stainless steel devices

PDF CAD
www.aircom.net

* Product group
 Order example:
QP10-03NR