


<b>Description</b>	diaphragm-operated pressure regulator in small design
<b>Media</b>	compressed air, gases or liquids
<b>Supply pressure</b>	max. 21 bar
<b>Adjustment</b>	by plastic knob with snap-lock, by hexagonal spindle at R354
<b>Relieving function</b>	relieving, optionally non-relieving
<b>Gauge port</b>	G $\frac{1}{4}$ on both sides of the body, screw plugs supplied
<b>Mounting position</b>	any
<b>Temperature range</b>	0 °C to 65 °C / 32 °F to 149 °F, for appropriately conditioned compressed air down to -30 °C / -22 °F
<b>Material</b>	Body: stainless steel 316 Spring cage: glass fibre-reinforced plastic at R364, stainless steel 316 at R354, optionally fibreglass at R364 Elastomer: FKM Inner valve: stainless steel 316

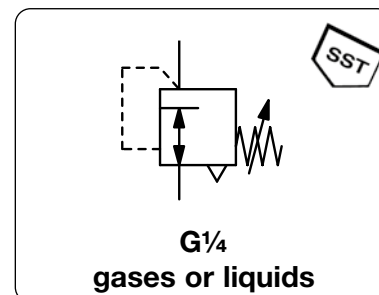

Dimensions			Description	K <sub>v</sub> -value	Flow rate		Connection thread	Pressure range	Order number
A	B	C		(m <sup>3</sup> /h)	m <sup>3</sup> /h*1	l/min*1	G	bar	
mm	mm	mm							

## Stainless steel pressure regulator

supply pressure max. 21 bar

## R364-S

35	75	13	relieving for compressed air	0.4	27	450	G $\frac{1}{4}$	0.2 ... 1.8 0.2 ... 4.0 0.3 ... 9.0	<b>R364-02AS</b> <b>R364-02BS</b> <b>R364-02CS</b>
35	75	13	non-relieving for liquids	0.4	0,4	6	G $\frac{1}{4}$	0.2 ... 1.8 0.2 ... 4.0 0.3 ... 9.0	<b>R364-02ASK</b> <b>R364-02BSK</b> <b>R364-02CSK</b>



R364-S

## Special options, add the appropriate letter


free of oil and grease specially cleaned

R3.4-0 . . . L




## Accessories, enclosed

pressure gauge	Ø 40 mm, 0 ... *2 bar, G $\frac{1}{4}$
mounting bracket	
mounting nut	made of stainless steel made of plastic

**MS4002-..\*2**  
**BW30-03S**  
**M30x1,5S**  
**M30x1,5K**

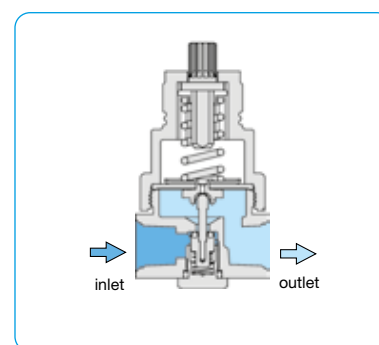

SST  
SST  
15

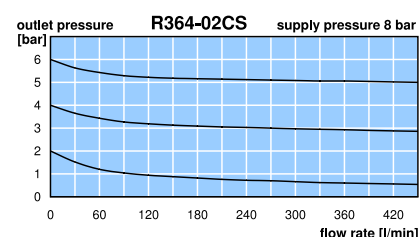

\*1 at 8 bar supply pressure, 6 bar outlet pressure and 1 bar pressure drop  
\*2 02 = 0...2.5 bar, 04 = 0...4 bar, 10 = 0...10 bar, 16 = 0...16 bar, 25 = 0...25 bar