


| | |
|---------------------------|--|
| Description | Lubricator for compressed air with bowl without sight glass, extremely robust, with manual adjustment of oil drip rate. |
| Bowl | stainless steel version without sight glass up to G1 brass version without sight glass at G1½ and G2 |
| Operating pressure | max. 50 bar |
| Temperature range | 0 °C to 80 °C / 32 °F to 176 °F for FKM 0 °C to 130 °C / 32 °F to 266 °F for high temperature version, for appropriately conditioned air down to -20 °C / -4 °F |
| Material | Body: brass Bowl: stainless steel 316L / material no. 1.4404 Elastomer: FKM Inner valve: brass and plastic (not at high temperature version) |



G¹/₈ up to G2, max. 50 bar
-40 °C to 130 °C / -40 °F to 266 °F

| Dimensions | | | Bowl | | Flow | | Operating | Connection | Order |
|------------|----|----|---------|----------|---------------------|---------|-----------|------------|--------|
| A | B | C | Desing | Capacity | rate | rate | pressure | thread | number |
| mm | mm | mm | made of | l | m ³ /h*1 | l/min*1 | max. bar | G | |

| Compressed air lubricator made of brass | | | | | | | | | Operating pressure max. 50 bar | LM |
|---|-----|-----|-----------------|------|-----|------|----|-------------------------------|--------------------------------|----|
| 64 | 173 | 130 | stainless steel | 0.14 | 54 | 900 | 50 | G ¹ / ₄ | LM-02 | |
| 79 | 175 | 130 | stainless steel | 0.20 | 144 | 2400 | 50 | G ¹ / ₂ | LM-04 | |






LM-02

Special options, add the appropriate letter or number

up to 130 °C / 266 °F high temperature version LM-..X54
flange connection see chapter for stainless steel devices / flanges LM-..F.



LM-04

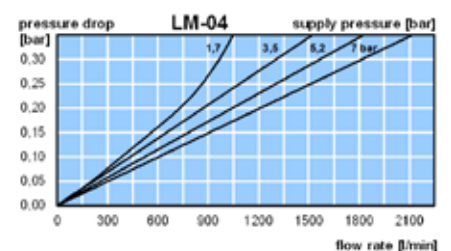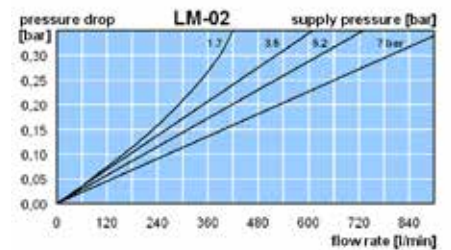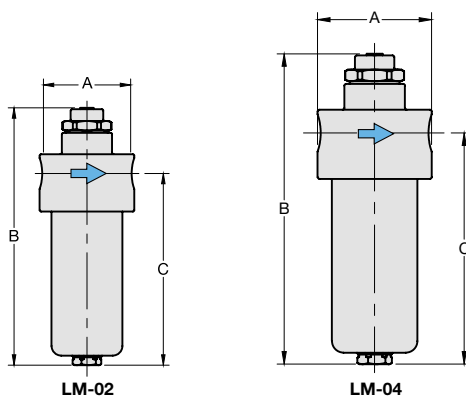

*1 at 7 bar operating pressure and 0.33 bar pressure drop

