


| | | | |
|----------------------------|---|--------------------------------|--|
| Description | Standard type mist lubricator of modular design with exchangeable insert kits. Can be interlocked with a filter or regulator without need for double nipples. A bypass valve and venturi nozzle guarantee low pressure drop and uniform lubrication of the compressed air. All "maxi" instruments are easy to take out of fixed piping by simply removing the two fastening bolts on the insert kits. | | |
| Bowl | metal bowl with sight glass | | |
| Operating pressure | max. 17 bar | | |
| Oil refilling | oil refilling under pressure possible | | |
| Oil level indicator | red ball inside the sight glass indicates oil level | | |
| Temperature range | 0 °C to 70 °C / 32 °F to 158 °F | | |
| Material | Body: Bowl: | zinc die-cast zinc die-cast | Sight glass: Elastomer: polyurethane NBR/Buna-N |



| Dimensions | | | Bowl | Flow | Operating | Connection | Order | A* |
|------------|----|----|--------------|-------------------|-----------|------------|--------|----|
| A | B | C | Design | rate | pressure | thread | number | |
| mm | mm | mm | made of/with | m³/h*1 l/min*1 | max. bar | G | | |

| "Maxi" lubricator | | | | operating pressure max. 17 bar | | | | L20 | |
|-------------------|-----|-----|-------------------|--------------------------------|-----|------|----|-----|---------|
| 89 | 229 | 170 | metal/sight glass | 0.3 | 336 | 5600 | 17 | G½ | L20-04W |
| 111 | 229 | 170 | metal/sight glass | 0.3 | 420 | 7000 | | G¾ | L20-06W |
| | | | | | 438 | 7300 | | G1 | L20-08W |

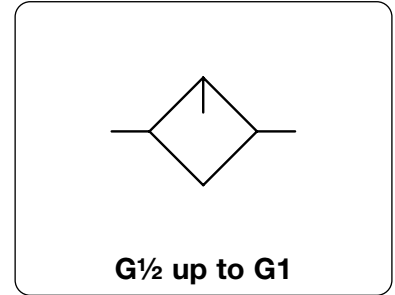




L20

Special options, add the appropriate letter

| | | |
|-----|-------------------|----------|
| NPT | connection thread | L20-0.WN |
|-----|-------------------|----------|

Accessories, enclosed

| | | |
|-----------------|---------------|-----------|
| set of brackets | made of steel | MK20-0100 |
|-----------------|---------------|-----------|

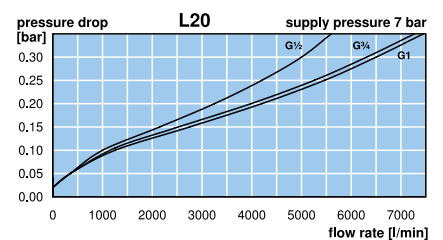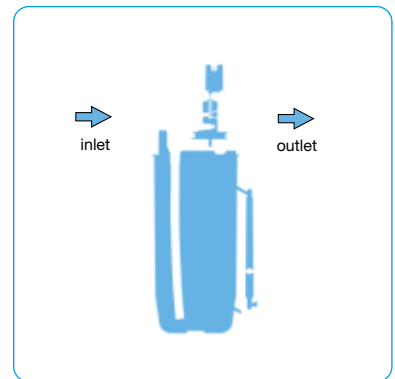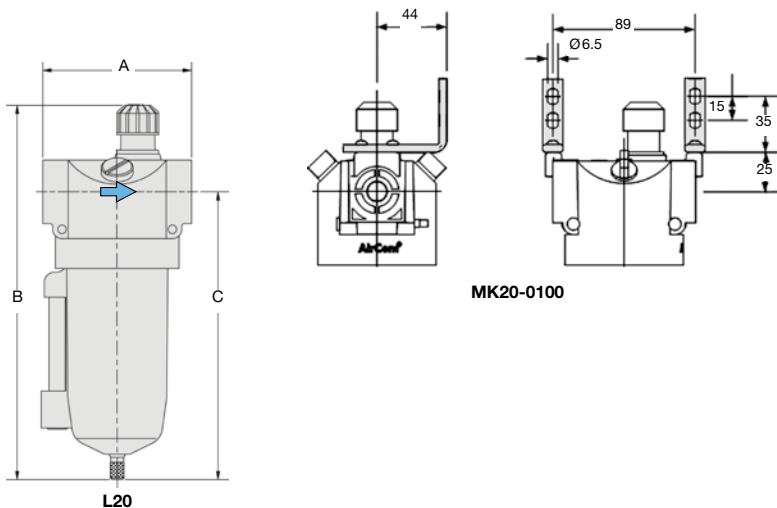

*1 at 7 bar operating pressure and 0.33 bar pressure drop

* Product group

Extensions: see chapter for FRL service units

PDF CAD
www.aircom.net



Order example:
L20-04W

