


Description	Extremely robust FRL service unit made of brass.		
Media	compressed air, non-corrosive gases or liquids		
Supply pressure	max. 50 bar at CM2,	max. 30 bar at CM3, optionally max. 50 bar (all without drain)	
Adjustment	by black plastic knob at CM.-02,	by T-handle with locknut at CM.-04	
Gauge port	G $\frac{1}{4}$ on both sides of the body, one screw plug supplied		
Filter element	50 μ m, optionally 5 μ m, made of stainless steel		
Bowl	stainless steel version without sight glass		
Drainage	screw plug as standard, optionally manual drain (max. 30 bar) or automatic drain (max. 16 bar)		
Temperature range	0 °C to 80 °C / 32 °F to 176 °F FKM	0 °C to 130 °C / 32 °F to 212 °F high temperature version	for appropriately conditioned compressed air down to -20 °C / -4 °F
Material	Body: brass	Bowl: stainless steel 316L / 1.4404 at G $\frac{1}{8}$ to G1, brass at G $\frac{1}{2}$ and G2	Elastomer: FKM optionally EPDM
	Knob: plastic at sizes G $\frac{1}{4}$, brass at G $\frac{1}{2}$	Inner valve: brass and plastic (not at option X54)	



**G $\frac{1}{8}$ and G $\frac{1}{2}$, max. 50 bar
-20 to 130 °C / -40 to 266 °F**

Dimensions			Combination consisting of	Bowl design made of	Flow rate		Connection thread G	Order number
A	B	C			m 3 /h*1	l/min*1		

FRL unit, 2-part				P $_1$: max. 50 bar, screw plug,	P $_2$: 0.5...8 bar, relieving,	50 μ m, with pressure gauge	CM2	
138	220	123	BM+LM	stainless steel	51	850	G $\frac{1}{4}$	CM2-02
168	247	127			138	2 300	G $\frac{1}{2}$	CM2-04



CM2-04

FRL unit, 3-part				P $_1$: max. 30 bar, screw plug,	P $_2$: 0.5...8 bar, relieving,	50 μ m, with pressure gauge	CM3	
212	173	129	FM+R120+LM	stainless steel	51	850	G $\frac{1}{4}$	CM3-02
256	175	130			138	2 300	G $\frac{1}{2}$	CM3-04




CM3-02

Special options, add the appropriate letter


5 μ m filter element		CM . . . G
0.2... 3 bar pressure range		CM . . . B
1 ...15 bar pressure range	P $_1$ max. 50 bar	CM . . . D
manual drain	max. 30 bar	CM . . . H
automatic drain	made of stainless steel, max. 16 bar	CM . . . R
up to 130 °C / 266 °F	high temperature version	CM . . . X54
flange connection	see chapter for stainless steel devices / flanges	CM . . . F.

Accessories, enclosed



mounting bracket	made of stainless steel	for G $\frac{1}{4}$	BW35-01S
mounting nut			M35x1,5S
mounting bracket	made of stainless steel	for G $\frac{1}{2}$	BW50-01S
mounting nut			M50x1,5S

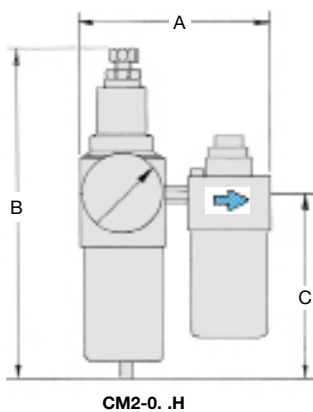

CM2-0. .H

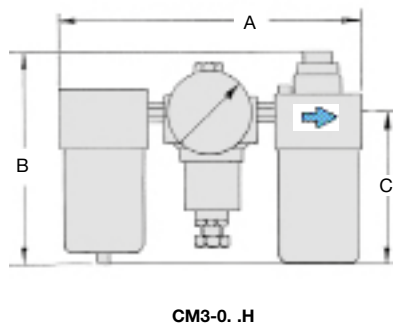

CM3-0. .H

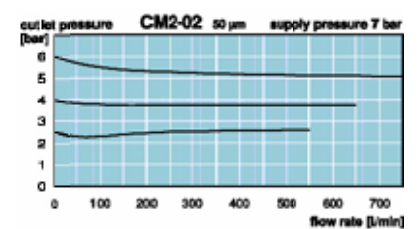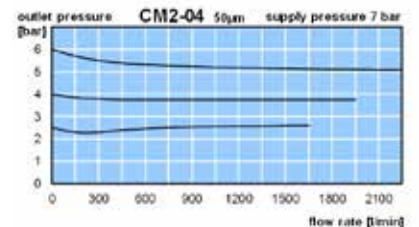

*1 at 7 bar supply pressure, 6 bar outlet pressure and 1 bar pressure drop

Further details: see chapter for single devices
Spare parts: see separate spare parts list

PDF CAD
www.aircom.net



Order example:
CM2-02