


Description	The back pressure regulator is a high-flow, high-precision pneumatic relief valve with adjustable setpoint. It provides protection against overpressure in the downstream section of pneumatic systems. A convoluted diaphragm provides the sensitivity for venting to the atmosphere in response to the slightest upstream change.
Media	compressed air or non-corrosive gases
Overpressure	max. 17 bar
Adjustment	by handwheel with locknut
Gauge port	G $\frac{1}{4}$ on both sides of the body, screw plugs supplied
Mounting position	any
Temperature range	0 °C to 70 °C / 32 °F to 158 °F, for appropriately conditioned compressed air down to -40 °C / -40 °F
Material	Body: aluminium die-cast Elastomer: NBR/Buna-N Inner valve: stainless steel and brass



G $\frac{1}{4}$ / $\frac{1}{4}$ " up to $\frac{1}{2}$ " NPT
10... 140 mbar/10 bar

Dimensions			Relief capacity	Over-pressure	Connection thread	Adjustment range	Order number
A	B	C	l/min*1	max. bar	G	bar	
mm	mm	mm					

Precision back pressure regulator						overpressure max. 17 bar	DB240
67	154	19	1100	17	G¼	0.01 ... 0.14	DB240-020
						0.01 ... 1.0	DB240-02A
						0.01 ... 2.0	DB240-02B
						0.07 ... 4.0	DB240-02C
						0.14 ... 10	DB240-02D




DB240

Special options, add the appropriate letter


$\frac{1}{4}$" NPT	connection thread	DB240-02 . N
$\frac{3}{8}$" NPT	connection thread	DB240-03 . N
$\frac{1}{2}$" NPT	connection thread, recommended for mbar range	DB240-04 . N
tamper-proof cap	aluminium, adjustment by screwdriver, total height 157 mm	DB240-0 . T

Accessories, enclosed


pressure gauge	Ø 50 mm, 0...*2 bar, G $\frac{1}{4}$, Bourdon tube, from 1 bar on	MA5002-...*2
	Ø 63 mm, 0...160 mbar, G $\frac{1}{4}$, capsule type	MA6302- C2
mounting bracket	made of steel	BW00-33

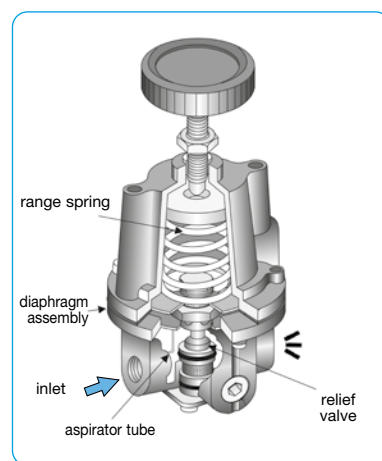


cross-section






DB240



DB240-...T
with tamper-proof cap



BW00-33

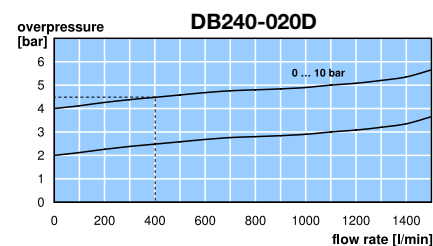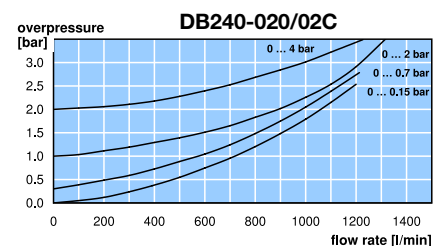

*1 at 5 bar overpressure and open outlet

*2 01 = 0...1 bar, 02 = 0...2.5 bar, 06 = 0...6 bar, 10 = 0...10 bar, 16 = 0...16 bar

Gauges: see chapter for measuring devices

PDF CAD
www.aircom.net

* Product group



Order example:
DB240-020