


<b>General</b>	In-Line pressure regulator with factory-set outlet pressure, reducing from e.g. 10 bar to 5 bar. The outlet pressure cannot be subsequently adjusted. This safeguards against tampering.
<b>Description</b>	regulator for <b>drinking water</b> conforms to the FDA, EU and DIN 50930-6, TÜV drinking water directives
<b>Application</b>	applications areas such as drinking water, food and medical industry
<b>Supply pressure</b>	max. 15 bar
<b>Accuracy</b>	± 0.3 bar, for compressed air P <sub>i</sub> : 6 bar and 10 l/min
<b>Temperature range</b>	4 °C to 60 °C / 39.2 °F to 140 °F
<b>Material</b>	Body: Grivory® GV-5 FWA Inner parts: Stainless steel DIN 1.4404 / AISI 316L Diaphragm: EPDM



Dimensions			Flow rate	Supply	Connection	Outlet	Order
ØA	B	A/F	water	pressure	thread	pressure	number
mm	mm	mm	l/min*1	max. bar	G	bar*2	


Regulator for drinking water				Grivory, accuracy *2	P <sub>i</sub> : max. 15 bar,	239K
34	52	17	10	10	G1/4	1 <b>239K0210</b>
			10			2 <b>239K0220</b>
			10			3 <b>239K0230</b>
			10			4 <b>239K0240</b>
			10			5 <b>239K0250</b>
			10			6 <b>239K0260</b>
			10			7 <b>239K0270</b>
			10			8 <b>239K0280</b>

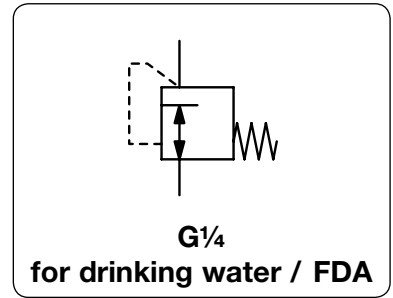


239K

## Special options, add the appropriate letter


<b>NPT</b>	connection thread	239K1 . . .
<b>deviant pressure range</b>	indicate on order	239K . . <b>XX</b>



239K



cross-section

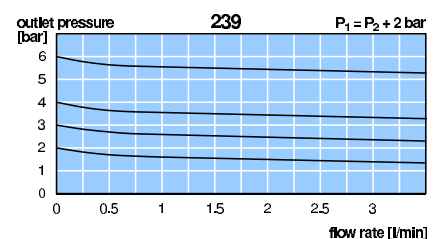

\*1 P<sub>i</sub> = 10 bar; Δp = 0.8 bar

\*2 Tolerance: < 4 bar ± 0.3 bar (air, P<sub>e</sub> = 6 bar, 10 l/min)  
≥ 4 bar ± 10% (air, P<sub>e</sub> = 10 bar, 10 l/min)

