


Description	Miniature pressure regulator with diaphragm, designed for compressed air and water applications. All internal wetted sections are corrosion-resistant, lead free and without any brass components. Regulator for modular application with many integrated fixing holes.		
Media	compressed air, non-corrosive gases or water		
Supply pressure	max. 11 bar		
Adjustment	by plastic knob with snap-lock		
Relieving function	relieving for air, non-relieving for water		
Gauge port	G½ on both sides of R25,	G¼ on both sides of R45, screw plugs supplied	
Mounting position	any		
Temperature range	0 °C to 50 °C / 32 °F to 122 °F		
Material	Body: glass fibre-reinforced acetal	Elastomer:	NBR/Buna-N
	Inner valve: glass fibre-reinforced acetal		



G $\frac{1}{8}$ to G $\frac{3}{8}$
compressed air or water

Dimensions			Flow rate		Connection	Pressure	Order no.	Order no. for
A	B	C	water	air	thread	range	for water	compressed air
mm	mm	mm	l/min*1	l/min*1	G	bar	non-relieving	relieving

Pressure regulator

supply pressure max. 11 bar

R25

40	78	12	3	150	G $\frac{1}{8}$	0...1.0	R25-010K	R25-010
						0...1.8	R25-01AK	R25-01A
						0...4.0	R25-01BK	R25-01B
						0...9.0	R25-01CK	R25-01C
40	78	12	3	150	G $\frac{1}{4}$	0...1.0	R25-020K	R25-020
						0...1.8	R25-02AK	R25-02A
						0...4.0	R25-02BK	R25-02B
						0...9.0	R25-02CK	R25-02C



R25

Pressure regulator for high flow

supply pressure max. 11 bar

R45

52	87	14	10	680	G $\frac{1}{4}$	0...1.8	R45-02AK	R45-02A
						0...4.0	R45-02BK	R45-02B
						0...9.0	R45-02CK	R45-02C
52	87	14	13	960	G $\frac{3}{8}$	0...1.8	R45-03AK	R45-03A
						0...4.0	R45-03BK	R45-03B
						0...9.0	R45-03CK	R45-03C








R45

Special options, add the appropriate letter

adjustment lock	socket wrench adjustment, height 64 mm	R25 only R25-0...T
------------------------	--	--------------------

Accessories, enclosed

pressure gauge	Ø 40 mm, 0... ^{*2} bar, G $\frac{1}{8}$	for R25 MA4001-..^{*2}
	Ø 50 mm, 0... ^{*2} bar, G $\frac{1}{4}$	for R45 MA5002-..^{*2}
mounting bracket	made of steel	BW30-02
mounting nut	made of plastic	R05X51
	made of aluminium	M30x1,5A

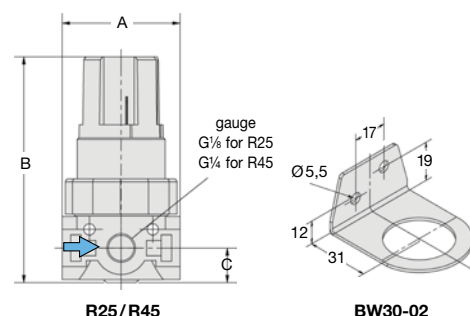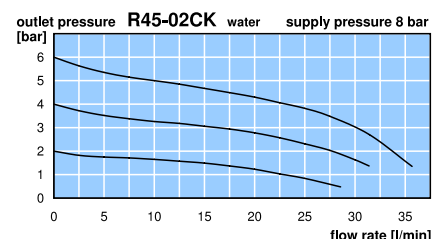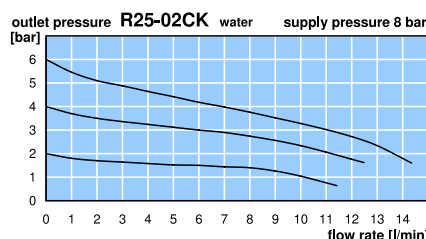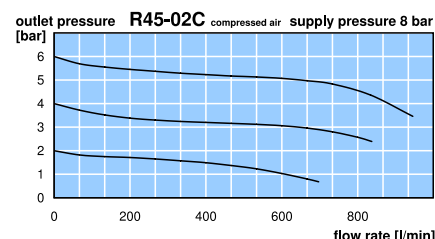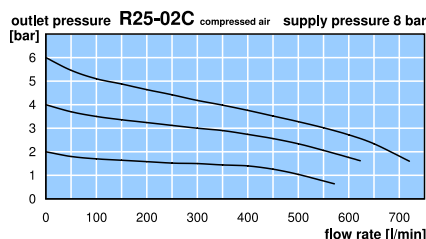

R25/R45

BW30-02

*1 at 8 bar supply pressure, 6 bar outlet pressure and 1 bar pressure drop, for water supply pressure 2 bar above outlet pressure
*2 01 = 0...1 bar, 02 = 0...2.5 bar, 04 = 0...4 bar, 10 = 0...10 bar

Gauges: see chapter for measuring devices

PDF CAD
www.aircom.net

* Product group



Order example:
R25-010K